

Geti





Chytrá WiFi zásuvka

Model: GSS01

Úvod

Děkujeme za zakoupení chytré zásuvky od společnosti Geti GSS01. Rádi poskytujeme našim zákazníkům vysoké kvalitní produkty pro zlepšení vaší domácnosti. Přechtěte si pečlivě informace o produktu, aby jste mohli produkt využívat všechny funkce a výhody, které tento produkt přináší. Dálkové ovládaná chytrá WiFi zásuvka s možností měření spotřeby. Zásuvka je ovládaná pomocí připojení WiFi u vás doma. Možnost ovládat z jakéhokoliv místa na světě pomocí mobilní aplikace, která je zdarma ke stažení pro iOS/Android. Lze připojit na hlasové ovládání chytrých domácností Amazon Alexa, nebo Google Home. Ovládat chytrou zásuvku může více členů domácnosti, stačí s nimi sdílet chytrou domácnost v aplikaci.

Obsah balení

1x chytrá WiFi zásuvka
1x uživatelská příručka

Funkční schéma

 LED indikátor

 Funkční tlačítko

Provozní napětí	AC 230V-50Hz
Max. výkon	3680W
Max. proudová zátěž	16A max
WiFi standard	2.4GHz (ujištěte se, že váš router má 2,4 GHz, jiný standard nepodporuje)
Provozní teplota	0 - 35°C
Skladovací teplota	-10 - +40°C
Provozní vlhkost	5 - 65%
WLAN specifikace	Standard: 802.11 b / g / n Síťování: WEP / WPA / WPA2 Rozsah frekvence: 2412 - 2472 MHz Typická výšlací síla: 802.11b : +18dBm 802.11g : +16dBm 802.11n(20MHz): +14dBm Kanály: 1-14

Bezpečnostní informace

UPOZORNĚNÍ: Přechtěte si před použitím všechny pokyny. Dodržujte pokyny a varování uvedené v této příručce. Nedodržení pokynů a varování může vést k nepřesným výsledkům a nebo k poškození samotného produktu.

VAROVÁNÍ: NEPŘIPOJUJTE zařízení, které přesahují příkon pro tuto zásuvku. Mohlo by dojít k přehřátí nebo způsobit možné poškození zařízení nebo jiného vybavení.

NEPOUŽÍVEJTE síťovou zásuvku, pokud je kabel poškozen, deformován, nebo jeví známky poškození. Mohlo by dojít k úrazu elektrickým proudem a k možnému zranění. S tímto napájením lze použít prodlužovací kabely, u zásuvky zkontrolujte, zda prodlužovací kabel může být použit pro max. napětí zástrčky.

NEPOUŽÍVEJTE síťovou zásuvku, pokud je jakýmkoli způsobem poškozena, nebo zdeformována.

NEPOKOUSEJTE se toto zařízení opravovat, rozebírat nebo upravovat za žádných okolností. Mohlo by dojít k poškození zařízení nebo způsobit úraz elektrickým proudem a možné zranění.

NEPOUŽÍVEJTE síťovou zásuvku v blízkosti zdroje tepla nebo na přímém slunečním světle.

NEPOUŽÍVEJTE síťovou zásuvku ve vlhkém prostředí.

NEPOUŽÍVEJTE síťovou zásuvku, pokud existuje zvláštní zápach nebo vyzářování tepla ze zásuvky nebo připojeného zařízení a okamžitě kontaktujte zákaznickou podporu.

NEDOTYKNEJTE se žádných elektrických spotřebičů mokřýma rukama ani se spotřebiči nemanipulujte v blízkosti tekutin. Při manipulaci se zásuvkou nepoužívejte nadměrnou sílu. Udržujte síťovou zásuvku vždy suchou a čistou.

NEPOUŽÍVEJTE k čištění zásuvky žádná rozpouštědla ani čisticí roztoky. Čistěte pouze suchým hadříkem.

Jak připojit WiFi?

Krok 1: Stažení a registrace

- Naskenujte kód QR a stáhnete si aplikaci „Smart Life“, nebo vyhledejte „Smart Life“ v obchodě Apple nebo Google Play a nainstalujete aplikaci.
- Otevřete aplikaci „Smart Life“, klepněte na „Registr“ a „Done“.







Krok 2: Přidání zařízení v snadném režimu


- Ujistěte se, že je vaše chytrá zásuvka zapnutá a v režimu párování. Indikátor, začne rychle blikat (cca 2x/s).
- Pokud ne, stiskněte a držte tlačítko zapnutí po dobu 5 sekund, dokud nezačne rychle blikat.
- Zapněte Bluetooth na svém mobilním telefonu.

Otevřete APP „Smart Life“, zapněte Bluetooth a oprávnění k umístění, klepněte na „+“ vpravo nahoře na APP.

- Aplikace začne hledat zařízení, klepněte na „Přidat“.
- Potvrdte WiFi síť a heslo. (Poznámka: doporučováno je pouze 2.4GHz)
- Zařízení bude připojeno pomocí APP „Smart Life“, klepněte na „Next“ a „Done“.

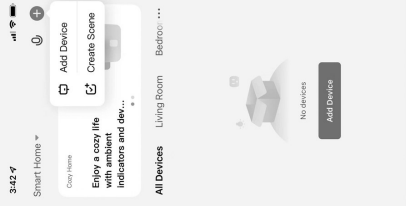







Geti





Model: GSS01

Inteligentná WiFi zásuvka


Úvod

Ďakujeme za zakúpenie inteligentnej zásuvky od spoločnosti Geti GSS01. Radi poskytneme našim zákazníkom vysoko kvalitné produkty pre zlepšenie vašej domácnosti. Prečítajte si pozorne informácie o produkte, aby ste mohli naplno využívať všetky funkcie a výhody, ktoré tento produkt prináša. Dialkovo ovládaná inteligentná WiFi zásuvka s možnosťou merania spotreby. Zásuvka je ovládaná pomocou pripojenia WiFi u vás doma. Možnosť ovládať z akéhokoľvek miesta na svete pomocou mobilnej aplikácie, ktorá je zadarmo k stiahnutiu pre iOS / Android. Možno pripojiť na hlasové ovládanie Smart domácností Amazon Alexa, alebo Google Home. Ovládať inteligentnú zásuvku môže viac členov domácnosti, stačí s nimi doraziť naše novéných noriem zdieľať smart domácnosť v aplikácii.

Obsah balenia

- 1x inteligentná WiFi zásuvka
- 1x užívateľská príručka

Funkčné schéma

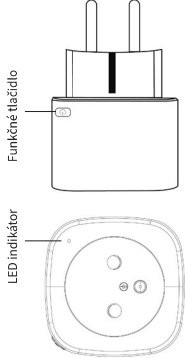

LED indikátor


Funkčné tlačidlo

NEPOUŽÍVAJTE na čistenie zásuvky žiadne rozpušťadlá ani čistiace roztoky. Čistite iba mäkkou suchou handričkou. Nikdy nepreťažujte elektrické obvody, pretože to môže spôsobiť úraz elektrickým prúdom alebo požiar.

Ako pripojiť WiFi?

Krok 1: Stiahnutie a registrácia

- Naskenujte kód QR a stiahnite si aplikáciu „Smart Life“, alebo vyhľadajte „Smart Life“ v obchode Apple alebo Google Play a nainštalujte aplikáciu.
- Otvorte aplikáciu „Smart Life“, kliknite na „Register“ („Registrovať“) a získajte účet s vašim telefónnym číslom alebo e-mailom. Prihláste sa do aplikácie.

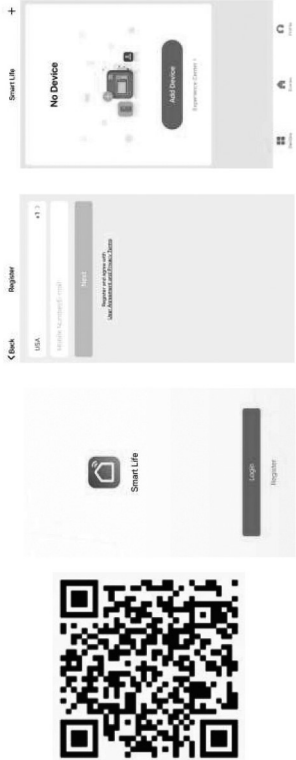

Krok 2: Prídanie zariadenia v jednoduchom režime

- Ujistite sa, že vaša inteligentná zásuvka je zapnutá a v režime párovania. Indikátor začne rýchlo blikať (cca 2/s). Ak nie, stlačte a držte tlačidlo zapnutia 5 sekúnd, až kým nezačne blikať rýchlo.

Špecifikácie

Prevádzkové napätie	AC 230V~50Hz
Max. výkon	3680W
Max. prúdová záťaž	16A max
WiFi štandard	2.4GHz (uistite sa, že váš router má 2.4 GHz, iný štandard nepodporuje)
Prevádzková teplota	0 ~ 35°C
Skladovacia teplota	-10 ~ +40°C
Prevádzková vlhkosť	5 ~ 65%
WLAN špecifikácie	Štandard: 802.11 b / g / n Sifrovanie: WEP / WPA / WPA2 Rozsah frekvencie: 2412 ~ 2472 MHz Typická výšlaci sila: 802.11b: + 18dB 802.11g: + 16dB 802.11n (20MHz): + 14dBm Kanály: 1-14

Bezpečnostní informace

UPOZORNENIE: Prečítajte si pred použitím všetky pokyny. Dodržujte pokyny a upozornenia uvedené v tejto príručke. Nedodržanie pokynov a varovaní môže viesť k nepriemym následkom alebo poškodeniu produktu.

VAROVANIE: NEPRÍPAJAJTE zariadenie, ktoré presahuje príkony pre túto zásuvku. Môhlo by dôjsť k prehriatiu alebo spôsobí možné poškodenie zariadenia alebo iného vybavenia.

NEPOUŽÍVAJTE sieťovú zásuvku, pokiaľ je kábel poškodený, deformovaný, alebo javí známky poškodenia. Môhlo by dôjsť k úrazu elektrickým prúdom a k možnému zraneniu. S týmito napájaním možno použiť predlžovacie káble, u zásuvky skontrolujte, či predlžovací kábel môže byť použitý pre max. napätie zástrčky.

NEPOUŽÍVAJTE sieťovú zásuvku, pokiaľ je akýkoľvek spôsobom poškodená, alebo zdeformovaná.

NESKÚSAJTE toto zariadenie opravovať, rozoberať alebo upravovať za žiadnych okolností. Môhlo by dôjsť k poškodeniu zariadenia alebo spôsobí úraz elektrickým prúdom a možné zranenia.

NEPOUŽÍVAJTE sieťovú zásuvku v blízkosti zdroja tepla alebo na priamom slnecnom svetle.

NEPOUŽÍVAJTE sieťovú zásuvku vo vlhkom prostredí.


NEPOUŽÍVAJTE sieťovú zásuvku, ak existuje zvláštny zápch alebo výžarovanie tepla zo zásuvky alebo pripojeného zariadenia a okamžite kontaktujte zákaznícku podporu.

NEDOTÝKAJTE sa žiadnych elektrických spotrebičov mokrymi rukami ani so spotrebičmi nemanipulujte v blízkosti tekutín. Pri manipulácii so zásuvkou nepoužívajte nadmernú silu. Udržujte sieťovú zásuvku vždy suchú a čistú.

- Zapnite Bluetooth na svojom mobilnom telefóne.

- Otvorte APP „Smart Life“, zapnite Bluetooth a povolenie na umiestnenie, kliknite na „+“ vpravo hore na APP.
- Aplikácia začne hľadať zariadenie. Kliknite na „Pridať“.
- Potvrdíte WiFi sieť a heslo. (Poznámka: Podporované je len 2,4 GHz.)
- Zariadenie bude pripojené pomocou APP „Smart Life“, kliknite na „Next“ a „Done“.

(Poznámka: Názov zariadenia bude rovnaký na Amazon Alexa a Google Home.)

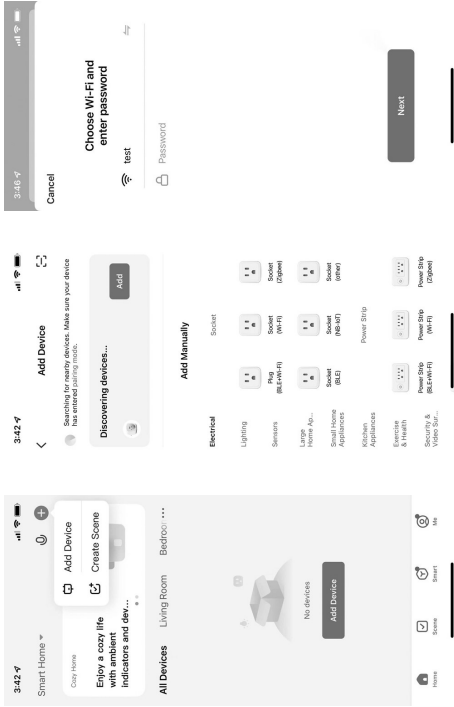






Smart WiFi socket

Model: GSS01

Introduction

Thank you for purchasing the smart power socket. We are dedicated to provide our customers with high quality products to enjoy smart life.

Package content

1x Smart power socket
1x User manual

Function diagram




Specifications

Power supply	AC 230V~50Hz
Max. power	3680W
Single outlet current	16A max
WiFi standard	2.4GHz WiFi, BT (make sure your router is 2.4 GHz, if the router has two line)
Operation temperature	0 ~ 35°C
Storage temperature	-10 ~ +40°C
Humidity in operation	5 ~ 65%
WLAN specification	Standard: 802.11 b / g / n Encryption: WEP / WPA / WPA2 Frequency range: 2412 ~ 2472 MHz Typical transmitting power: 802.11b: + 18dB 802.11g: + 16dB 802.11n (20MHz): + 14dBm Channel: 1-14

Safety information

IMPORTANT: Please read and comply with all of the instructions and warnings provided in this manual before using the product. Failure to comply with the instructions and warnings provided may result in inaccurate results and/or damage to the product itself.

WARNING: DO NOT connect a device that exceeds the power ratings for this power socket. Doing so may over-heat or cause possible damage to the device or other equipment.

DO NOT USE the power socket if the cord is damaged in any way, shape, or form. Doing so may cause electric shock and possible injury. Extension cords can be used with this power socket; check to make sure that the extension cord can handle the voltage of the power socket.

DO NOT USE the power socket if it is damaged in any way, shape, or form.

DO NOT ATTEMPT to repair, disassemble or modify this device under any circumstances. Doing so may damage the device or cause electric shock and possible injury.

DO NOT PLACE the power socket near any heat source or in direct sunlight.

DO NOT PLACE or operate the power socket in high-humidity environments.

DO NOT OPERATE the power socket if there is a strange odor or heat emitting from the power socket or a connected device, contact customer support immediately.

DO NOT TOUCH any electrical appliances with wet hands or handle appliances near liquids. Avoid using excessive force when handling the power socket. Keep the power socket dry and clean at all times.

DO NOT USE any solvents or cleaning solutions on the power socket. Clean only with a soft, dry cloth. Never overload electrical circuits as it may cause an electrical shock or fire.

How to connect Wifi?

Step 1: Download & Register

- Scan the QR Code to download „Smart Life“ APP. Or Search „Smart Life“ in Apple store or Google Play to install the APP.
- Open the „Smart Life“ APP, tap „Register“to get an account with your phone number or E-mail. Sign in the APP.





Step 2: Add Devices in Easy Mode

- Make sure your smart socket is turned on and in pairing mode with indicator beginning to flash quickly (about 2 times/second). If not, press and hold the power button for 5 seconds until it begins to flash quickly.

Turn on the Bluetooth on your mobile phone.

- Open your „Smart Life“ APP, enable the Bluetooth and location permission, tap „+“ on the top right of the APP.
- The App will start discovering devices, tap “Add”.
- Confirm the WiFi network and password. (Note: Only 2.4GHz is supported.)
- The device will be connected with „Smart Life“ APP, tap “Next” and “Done”.

(Note: The device name will appear the same on Amazon Alexa and Google Home.)

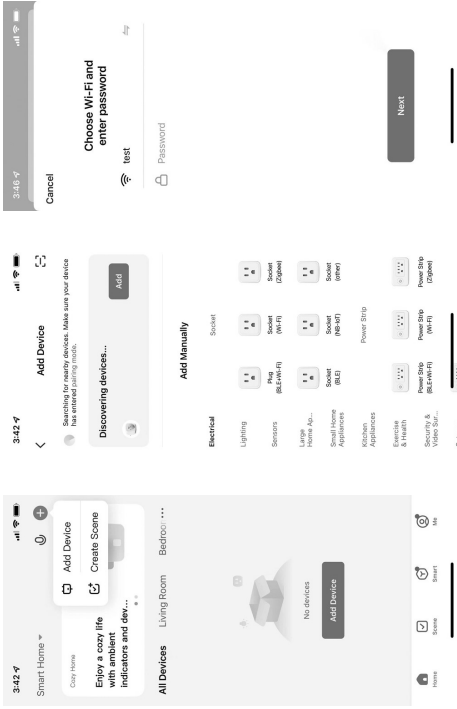

3:40 Found 1 device. Added 0 successfully. smart plug FR Would you like to save this password in your Keychain to use with apps and websites? You can turn off Passwords settings. Save Password Not Now 3:43 Found 1 device. Added 1 successfully. smart plug FR Next 3:43 Added. smart plug FR Devices added successfully Living Room Dining Room Bedroom Office Second Bedroom Study Room Step 3: Control your smart socket via smart life APP anytime and anywhere • (make sure your mobile phone and smart socket are all connected to the network). To enjoy more functions refer to the APP interface. Step 4: Share your devices with your friend or family after you add your devices successfully.	Control your smart device through Echo (Echo need to discover your smart devices before the control) • You can say „Alexa, discover devices” to Echo, or you can also Tap „Discover devices” on APP to discover the smart devices. • Discovered devices will be shown in the list. (Note: Every time you change the name of devices on Smart Life App, Echo must re-discover devices before the control). Now you can control your smart devices through Echo. You can use following commands to control them. (e.g., Socket1): ✓. Alexa, turn on/off the socket1 ✓. Alexa, turn on the socket in 5mins ... Quick Guide of using Google Home Sign in with Smart Life account, add the device, then change the name to an easily recognized word or phrase, like „Bed-room socket” „Socket1” etc. Set up Google Home with Google Home APP 1. Make sure your Google Home is set up. 2. Open the Google Home app by tapping the app icon on your mobile device. 3. Tap „ACCEPT” to agree to the Terms of Service and Privacy Policy. Allow Google Home app to access the device location to discover and set up nearby devices. 4. Tap „SIGN IN”, choose one Google account that you already logged in on your mobile device. Or follow the instructions to sign in with a new Google account. 5. The Google Home app scans nearby devices that are ON and are ready to set up. Tap „SET UP” to set up your Google Home. 6. When Google Home app is successfully connected to the Google Home device, tap „PLAY TEST SOUND”, it will play a test sound to confirm you are connected to the right device. If you hear the test sound, tap „I HEARD IT”. 7. Select the Room (ex Living Room) where your Google Home is located. This helps you identify the device when you want to cast to it. Choose the WiFi network you want to connect to your Google Home. To automatically fetch the password for this network on this device, tap „OK”, then the password will appear in the password field. You can also manually enter your password. Then tap „CONTINUE”.
---	--

Quick Guide of Using Amazon Echo Before using Amazon Echo to control your devices, make sure you meet the following conditions. ✓. Amazon Alexa APP and account ✓. An Echo device, including Echo, Echo Dot and Echo Tap ✓. Smart socket Sign in with Smart Life account, add the device, then change the name to an easily recognized word or phrase, like „Bed-room socket” „Socket1” etc. Set up Echo with Amazon Alexa APP • Sign in with Amazon account. • Tap the Homepage on the top left, tap „Settings” and „Set up a new device”. • Select an Echo device, long press the dot button until the orange light shows up and tap „Continue”. • Select your WiFi network and connect it to your device according to the instructions. This may take several minutes. Enable the skills in Alexa APP (Note: If a Smart Life account has been linked before, you can use it directly, or you can also tap „Disable skills” to remove it) • Tap the Homepage on the top left, Select „Skills”. • Search „Smart Life” and select „Smart Life” • Tap „Enable Skills” to enable the Smart Life Skill, you will be redirected to the account link page. • Type your Smart Life account and password, do not forget to select the country/region where your account belongs to. • Tap „Link Now” to link your Smart Life account. • Leave the page when „Alexa has been successfully linked with Smart Life” shows up.	8. Google Home will now attempt to connect to the provided WiFi network. When Google Home is successfully connected to your Wi-Fi network, tap „CONTINUE”. 9. In order for the Google assistant to answer your questions and to enjoy a personalized experience, you must sign into your Google account, then tap „SIGN UP”. Choose the Google account you want to link your Google Home device to, then tap „CONTINUE AS XXX”. Enter the address where this Google Home is installed, and select your default music service. 10. Tap „SKIP TUTORIAL” to finish the setup. You can also tap „CONTINUE” to watch the Google Home tutorial. Link Smart Life account in Home Control ATTENTION: Due to the Google Home app’s known bug, you could only use one Google account to control „Home Control Action”. If you sign in Google Home app with several Google accounts, Control your smart devices through Google Home. Now you can control your smart devices through Google Home. Take smart socket as the example, the supported voice commands are as below: ✓. Ok Google, turn on/off the smart socket. ✓. Ok Google, turn on the smart socket in 5mins Product disposal At the end of the service life, do not throw the appliance away as unsorted communal waste. Use sorted waste collection points. By proper disposal of the product you help to prevent negative influences on human health and natural environment. Recycling of materials helps to protect our natural resources. You can obtain more information about recycling of this product from your municipality, household waste disposal organisation or the sales point, where you purchased the product. 
--	---